

TagPrint TD60

ENGLISH



STRONGER TOGETHER

TIPPER TIE™

TagPrint TD60

The TagPrint TD60 labelling system offers the perfect basis for consistent traceability of your products. It ensures comprehensive control of the complete process chain from the producer to the end consumer. The labels are printed and clipped in during production. They can be clipped on the left (SV4800) or right (TT1815/1512). By attaching various information such as date, weight, batch, lot number, producer's code, logos and barcodes, the labels become individual identification tags. Both pre-printed or blank labels can be used.

TagPrint Advantages

- Individual product identification during production
- On/Off function controlled by clipper and may be stored in a recipe
- Label information programmable in printer control
- Exact traceability of products
- Mobile and easy to connect
- Completely made of stainless steel, protected from splash water in hermetically sealed housing

Labels

- 3000 labels per roll
- Blank or in 8 colors also pre-printed on both sides
- Resistant to tearing
- Barcode compatible
- Water resistant and boil proof
- Optional clipping either on the first or second clip

TagPrint Function

The TagPrint TD60 labelling system is positioned behind the clipper and is fixed with the fixing rollers. A communication cable connects the TD60 to the clipper. The labels are fed from the roll into the printing system and printed by thermal transfer. The labels printed on one side run via the label dispenser into the clipping area of the clipper. Then the label is placed into the clip and cut off. The system is controlled via the clipper, or with a separate PLC. The cycle time of the clipper is not reduced by the insertion of the labels.



Label original size

Technical Specifications


Compatible with:	SV4800, TT1815, TT1512
Width:	650mm
Depth:	700mm
Height:	1340mm
Weight:	45kg
Control:	Label programmed in printer; On/off and counter control via clipper
Supply Voltage:	230V, 50/60 Hz
Fuse Protection:	1kW



Labels and printing system are installed in a hermetically sealed stainless steel housing.



Labels are printed with the printing system and clipped into the exact position via the label dispenser.

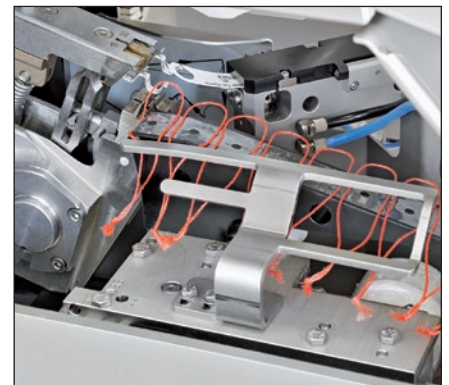

Label is securely attached to the product together with the clip and the loop.

TIPPER TIE, Inc.
2000 Lufkin Road
Apex, NC 27539 USA
Tel. +1 919 362 8811
Fax +1 919 362 4839
infoUS@tippertie.com

TIPPER TIE TECHNOPACK GmbH
Wilhelm-Bergner-Strasse 9a
21509 Glinde/Germany
Tel. +49 40 72 77 04 0
Fax +49 40 72 77 04 100
infoDE@tippertie.com

